

## Spectrum-DMRIP-400s

A compact all-outdoor packet radio solution, combining the advantages of an all-outdoor profile with carrier-grade performance of DMR Family, generates significant CAPEX and OPEX savings.

**DMRIP-400s** is the innovative packet radio which is the perfect replacement of optical fiber cable and FSO.

Robust and durable single-box structure withstands harsh weather conditions and can be easily mounted on towers, rooftops, lamp posts, traffic light poles and small outdoor mobile cell-sites.

Enhanced spectrum utilization, low-latency traffic and comprehensive synchronization solution.

Software-scalable bandwidths (ETSI up to 112 MHz, FCC up to 80MHz) and adaptive modulation schemes (QPSK-4096QAM) provide traffic with more flexibility and strong adaptability to various application environments.

DMRIP-400s is compliant with the IEEE 802.1/3 and RFC standards for various Ethernet functionalities.

User-friendly Management- Telnet, WEB GUI, NMS, SNMP Manager. Software and firmware online upgradeable.

## Applications

### 4G and 5G mobile Backhaul

DMRIP-400s is a perfect fit for 3G/4G/5G base station backhaul to replace optical fiber and FSO, ideally for new all-packet base station, and caters to various connection needs: voice, data, management and control. With SynE synchronization, DMRIP-400s could meet any RAN network requirement. With external PWE3 interface unit, Smart Packet could provide up to 8E1 and more Ethernet interfaces for 2G/3G/4/5G co-site scenario.

## Features

- Zero footprint, fully outdoor and cost-effective solution
- (QPSK-4096QAM) to secure best link performance
- Advanced multilevel LDPC and RS FEC
- Up to 4Gbps capacity with Hitless Automatic Adaptive Coding and Modulation (HAACM)
- The capacity can be up to 8Gbps by 2-radios aggregation
- Power supply with coaxial cable or 2-wire cable
- Multi-GE ports with 2-10 Gb
- High availability and reliability based on licensed frequencies 5~44G
- Layer-2 switching, auto MDI/MDXI, VLAN, QoS, QinQ, STP/RSTP, LACP-
- 16K Mac Table Entries, - Jumbo frame up to 10240 bytes
- RF and digital loopback capability
- Adaptive digital Pre-distortion feature, - ATPC and built-in FEC function
- Built-in Bit Error Rate (BER) monitoring and spectrum scan
- Small and attractive profile, Low latency and low power consumption, wide operating temperature range fits all weather conditions
- Management capability as well as SNMP and Https
- Support Local and Remote loopback for Line checking - System Log for alarm, events, config.
- QoS (Quality of Service) based on port, VLAN ID/Priority, DSCP for traffic prioritization
- Scalable bandwidths (ETSI up to 112 MHz and flexible modulation schemes

upto 8G Throughput.

Complete outdoor **8+0 Radio**




### Broadband Access

DMRIP-400s is an affordable medium capacity radio solution for enterprises that need private lines and broadband Ethernet traffic. It offers solutions with fine combination of cost effectiveness & short commission time for the following applications:

### ISP Backhaul

DMRIP-400s allows ISPs, who own no land lines, to quickly establish a backhaul without quality compromises. ISPs can grow up their profits by delivering services with guaranteed SLA or reaching distant clients from their PTP using radios with similar cost at licensed frequencies to avoid spectrum congestion.

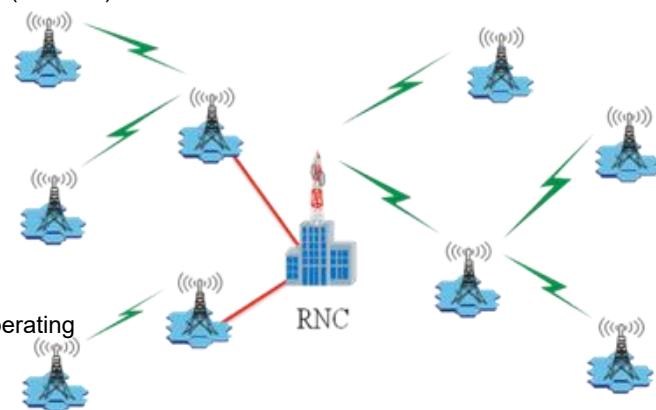


## Spectrum-DMRIP-400s

upto 8G Throughput.


Complete outdoor 8+0 Radio

- \* Dual-channels in each subband using dual-polarization (XPIC)
- \* Dual-channels in different subband using dual-polarization
- \* **Dual-channels with east/west and Add/drop feature**
- \* 8+0 by using 2 radios


### Channel configuration

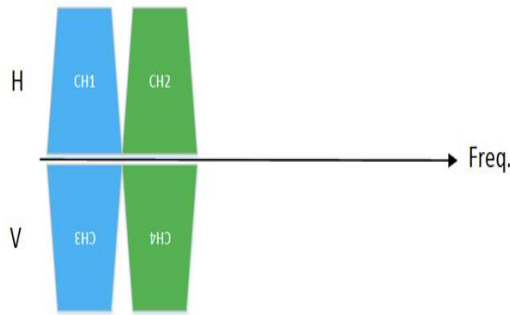

Dual-channels in each subband using dual polarization (XPIC) with OMT

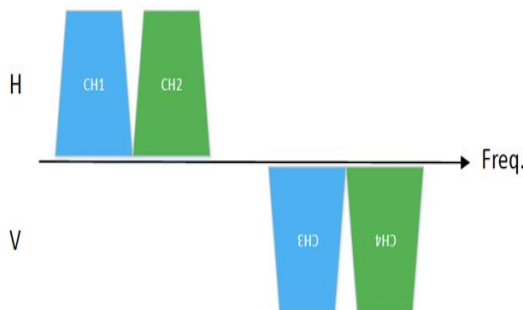

Dual-channels in different subband using dual-polarization with OMT

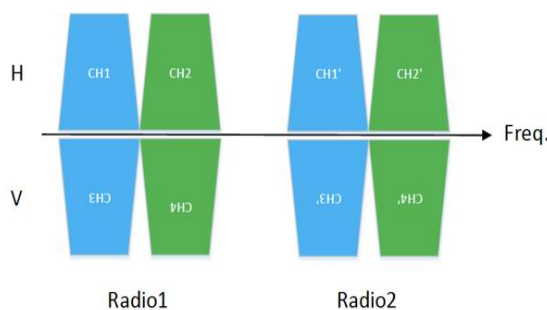

8+0 by using 2 radios with OMT plus combiner

## Spectrum-DMRIP-400s

upto 8G Throughput.  
Complete outdoor 8+0 Radio

### Specifications

Frequency		6.5GHz	7GHz	8GHz	11 GHz	13 GHz	15 GHz	18 GHz	23 GHz	
<b>Standard</b>		ETSI/ITU or customer specified								
<b>RF Output Power/per channel (dBm-Max)</b>	4096QAM	20	19	19	19	18	18	17	17	
	2048QAM	20	19	19	19	18	18	17	17	
	1024QAM	21	20	20	20	19	19	18	18	
	512QAM	21	20	20	20	19	19	18	18	
	256QAM	21	20	20	20	19	19	18	18	
	128QAM	21	20	20	20	19	19	18	18	
	64QAM	22	21	21	21	20	20	19	19	
	32QAM	22	21	21	21	20	20	19	19	
	16QAM	22	21	21	21	20	20	19	19	
	QPSK	22	21	21	21	20	20	19	19	
<b>RF Output Power(dBm- Min)</b>		0								
<b>Tuning Increment (dB)</b>		1								
<b>Accuracy (dB)</b>		±2								
<b>RX at BER=10-6 (dBm)</b>	112MHz	4096QAM	-49.1	N/A	-49.1	-48.6	-48.6	-48.6	-48.1	-48.1
		2048QAM	-53.0	N/A	-53.0	-52.5	-52.5	-52.5	-52.0	-52.0
		1024QAM	-56.1	N/A	-56.1	-55.6	-55.6	-55.6	-55.1	-55.1
		512QAM	-59.3	N/A	-59.3	-58.8	-58.8	-58.8	-58.3	-58.3
		256QAM	-62.3	N/A	-62.3	-61.8	-61.8	-61.8	-61.3	-61.3
		128QAM	-65.4	N/A	-65.4	-64.9	-64.9	-64.9	-64.4	-64.4
		64QAM	-68.3	N/A	-68.3	-67.8	-67.8	-67.8	-67.3	-67.3
		32QAM	-70.6	N/A	-70.6	-70.1	-70.1	-70.1	-69.6	-69.6
		16QAM	-73.7	N/A	-73.7	-73.2	-73.2	-73.2	-72.7	-72.7
	QPSK	-80.1	N/A	-80.1	-79.6	-79.6	-79.6	-79.1	-79.1	
	80MHz	4096QAM	-50.5	N/A	-50.5	-50.0	-50.0	-50.0	-49.5	-49.5
		2048QAM	-54.4	N/A	-54.4	-53.9	-53.9	-53.9	-53.4	-53.4
		1024QAM	-57.6	N/A	-57.6	-57.1	-57.1	-57.1	-56.6	-56.6
		512QAM	-60.7	N/A	-60.7	-60.2	-60.2	-60.2	-59.7	-59.7
		256QAM	-63.8	N/A	-63.8	-63.3	-63.3	-63.3	-62.8	-62.8
		128QAM	-66.9	N/A	-66.9	-66.4	-66.4	-66.4	-65.9	-65.9
		64QAM	-69.7	N/A	-69.7	-69.2	-69.2	-69.2	-68.7	-68.7
		32QAM	-72.1	N/A	-72.1	-71.6	-71.6	-71.6	-71.1	-71.1
		16QAM	-75.2	N/A	-75.2	-74.7	-74.7	-74.7	-74.2	-74.2
	QPSK	-81.7	N/A	-81.7	-81.2	-81.2	-81.2	-80.2	-80.2	
	56MHz	4096QAM	-51.9	-51.9	-51.9	-51.4	-51.4	-51.4	-50.9	-50.9
		2048QAM	-55.8	-55.8	-55.8	-55.3	-55.3	-55.3	-54.8	-54.8
		1024QAM	-59.1	-59.1	-59.1	-58.6	-58.6	-58.6	-58.1	-58.1
		512QAM	-62.3	-62.3	-62.3	-61.8	-61.8	-61.8	-61.3	-61.3
		256QAM	-65.4	-65.4	-65.4	-64.9	-64.9	-64.9	-64.4	-64.4
		128QAM	-68.4	-68.4	-68.4	-67.9	-67.9	-67.9	-67.4	-67.4
		64QAM	-71.2	-71.2	-71.2	-70.7	-70.7	-70.7	-70.3	-70.3
		32QAM	-73.7	-73.7	-73.7	-73.2	-73.2	-73.2	-72.7	-72.7
		16QAM	-76.8	-76.8	-76.8	-76.3	-76.3	-76.3	-75.8	-75.8
	QPSK	-83.2	-83.2	-83.2	-82.7	-82.7	-82.7	-82.2	-82.2	
	40MHz	4096QAM	-53.3	-53.3	-53.3	-52.8	-52.8	-52.8	-52.3	-52.3
		2048QAM	-57.2	-57.2	-57.2	-56.7	-56.7	-56.7	-56.2	-56.2
		1024QAM	-60.6	-60.6	-60.6	-60.1	-60.1	-60.1	-59.6	-59.6
		512QAM	-63.8	-63.8	-63.8	-63.3	-63.3	-63.3	-62.8	-62.8
		256QAM	-67.0	-67.0	-67.0	-66.5	-66.5	-66.5	-66.0	-66.0
		128QAM	-69.8	-69.8	-69.8	-69.3	-69.3	-69.3	-68.8	-68.8
		64QAM	-72.6	-72.6	-72.6	-72.1	-72.1	-72.1	-71.6	-71.6
		32QAM	-75.2	-75.2	-75.2	-74.7	-74.7	-74.7	-74.2	-74.2
		16QAM	-78.4	-78.4	-78.4	-77.9	-77.9	-77.9	-77.4	-77.4
	QPSK	-84.7	-84.7	-84.7	-84.2	-84.2	-84.2	-83.7	-83.7	
	28MHz	4096QAM	-54.6	-54.6	-54.6	-54.1	-54.1	-54.1	-53.6	-53.6
		2048QAM	-58.6	-58.6	-58.6	-58.1	-58.1	-58.1	-57.6	-57.6
		1024QAM	-62.1	-62.1	-62.1	-61.6	-61.6	-61.6	-61.1	-61.1
		512QAM	-65.4	-65.4	-65.4	-64.9	-64.9	-64.9	-64.4	-64.4
		256QAM	-68.5	-68.5	-68.5	-68.0	-68.0	-68.0	-67.5	-67.5
		128QAM	-71.3	-71.3	-71.3	-70.8	-70.8	-70.8	-70.3	-70.3
		64QAM	-74.1	-74.1	-74.1	-73.6	-73.6	-73.6	-73.1	-73.1
		32QAM	-76.8	-76.8	-76.8	-76.3	-76.3	-76.3	-75.8	-75.8
16QAM		-79.9	-79.9	-79.9	-79.4	-79.4	-79.4	-78.9	-78.9	
QPSK	-86.2	-86.2	-86.2	-85.7	-85.7	-85.7	-85.2	-85.2		

# Spectrum-DMRIP-400s

## upto 8G Throughput. Complete outdoor 8+0 Radio

<b>Flange</b>	UBR84	UBR84	UBR84	UBR100	UBR140	UBR140	UBR220	UBR220	
<b>RSSI</b>	Output voltage vs. RSL: 0~1.4V vs. -90~-20dBm(10dB/200mV)								
<b>RSL Accuracy</b>	±2 dB@-80~-30dBm, ±3 dB@-90~-80dBm or -30~-20dBm								
<b>Frequency Stability</b>	±5ppm								
<b>Frequency Source</b>	Synthesizer				<b>Max Input Level Without Damage</b>				0dBm
<b>Modulation</b>	QPSK~4096QAM				<b>ACM switching</b>				Hitless
<b>Throughput (single channel)/Mbps</b>	Up to 2800Mbps@4*80MHz (anatel) , 4Gbps@4*112MHz								
<b>Switch type</b>	10GE Layer 2				<b>QoS</b>				802.1p
<b>Max frame size</b>	10240 bytes				<b>QoS queuing</b>				Yes
<b>MAC table</b>	16k entries, auto learning & aging				<b>VLAN support</b>				802.1Q, QinQ
<b>Packet buffer</b>	8Mbit;non-blocking store & Forward				<b>Spanning tree protocol</b>				802.1D-1998 STP&RSTP
<b>Flow control</b>	802.3x				<b>Synchronization</b>				N/A
<b>SNMP</b>	SNMP traps, MIB,SNMP v1/v2c/v3,								
<b>EMS</b>	Web based HTTP, SNMP, https call								
<b>Interface</b>	2-10GE optical, Single-mode 10G SFP								
<b>NMS Interface</b>	Ethernet( in-band)								
<b>RSSI</b>	Mini-BNC								
<b>Power</b>	Coaxial cable with N-type connector								
<b>Power Supply</b>	-48V±20%								
<b>Power Consumption</b>	< 150W								
<b>Ambient Temperature</b>	-35~ +55 °C								
<b>Weight &amp;Dimension (kg/mm)</b>	TBD								
<b>Humidity</b>	All weather								
<b>Elevation</b>	15,000ft / 4572 m,IP65								

**Notes:** All Specifications are typical values and subject to change without prior notice.

Capacity (Mbps)/per channel											
BW	Mod	QPSK	16QAM	32QAM	64QAM	128QAM	256QAM	512QAM	1024QAM	2048QAM	4096QAM
28MHz	2+0	91.9	183.6	224.6	276.5	322.6	368.5	415.7	461.0	501.8	531.7
	4+0	182.8	367.2	449.2	553.1	645.2	737.1	831.4	922.0	1003.6	1063.4
	8+0	365.6	734.4	898.4	1106.2	1290.4	1474.2	1662.8	1844.0	2007.2	2126.8
29.65MHz	2+0	97.4	194.4	237.8	292.8	341.6	390.2	440.2	488.2	531.4	563.0
	4+0	194.8	388.8	475.6	585.6	683.2	780.4	880.4	976.4	1062.9	1126.1
	8+0	389.6	777.6	951.2	1171.2	1366.4	1560.8	1760.8	1952.8	2125.9	2252.3
40MHz	2+0	130.0	260.1	320.2	396.1	462.2	528.4	594.0	662.0	720.0	768.0
	4+0	260.0	520.0	640.0	792.0	924.0	1056.0	1188.0	1324.0	1440.0	1536.0
	8+0	520.0	1040.0	1280.0	1584.0	1848.0	2112.0	2376.0	2648.0	2880.0	3072.0
56MHz	2+0	183.8	367.2	449.2	553	645.2	737	831.4	922	1003.6	1063.4
	4+0	365.6	734.4	898.4	1106.2	1290.4	1474.2	1662.8	1844	2007.2	2126.8
	8+0	731.2	1468.8	1796.8	2212.4	2580.8	2948.4	3325.6	3688	4014.4	4253.6
59.3MHz	2+0	189.6	372.1	462.0	570.2	666.3	755.5	847.5	949.9	1024.0	1064.6
	4+0	379.1	744.1	923.9	1140.3	1332.6	1510.9	1694.9	1899.7	2047.9	2129.2
	8+0	758.2	1488.2	1847.8	2280.7	2665.2	3021.7	3389.8	3799.4	4095.8	4384.4
80MHz	2+0	244.35	478.0	596.8	734.5	858.8	969.75	1086.8	1221.7	1311.4	1406
	4+0	488.7	956.0	1193.6	1469.0	1717.6	1939.5	2173.6	2443.4	2622.8	2812.0
	8+0	977.4	1912.0	2387.2	2938.0	3435.2	3879.0	4347.2	4886.8	5245.6	5624.0
112MHz	2+0	367.6	734.4	898.4	1106	1290.4	1474	1662.8	1844	2007.2	2126.8
	4+0	731.2	1468.8	1796.8	2212.4	2580.8	2948.4	3325.6	3688	4014.4	4253.6
	8+0	1462.4	2937.6	3593.6	4424.8	5161.6	5896.8	6651.2	7376	8028.8	8507.2

**Note:**

1. For HC (head compression) at network traffic model 2, the capacity will increase about 20~30%

**For more detail contact:**

**Spectrum Communications FZE**

**email: sales@spectrummea.com**